

# PANORAMA® HILITE® 70




INTERIOR VIEW

## PANORAMA® HILITE® 70

Barely noticeable, Hilite 70 features high optical clarity with low reflectance for uncompromised views, while rejecting more than half of solar energy, to keep room temperature comfortable and reduce cooling costs.

Improve the quality of your life by keeping out uncomfortable heat, protecting your furnishings and letting in the view you love, while keeping visual reflectivity minimal.


Comparison of performance on 1/8" (3mm) thick clear glass.

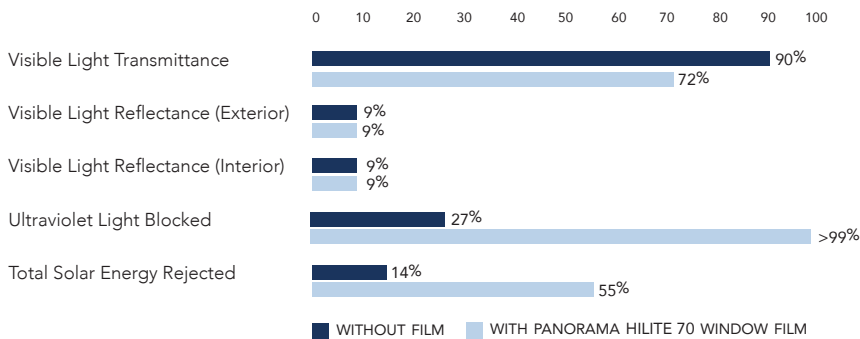

ONLY AVAILABLE THROUGH A PANORAMA DEALER

[www.solargard.com/panorama](http://www.solargard.com/panorama)

# PANORAMA® HILITE® 70



## Performance Parameters for Different Window Types

	1/8" (3mm) Single clear		1/4" (6 mm) Single clear		1/8" (3mm) Double clear		1/4" (6mm) Double clear	
	No film	Hilite 70	No film	Hilite 70	No film	Hilite 70	No film	Hilite 70
<b>Visible light</b>								
Transmittance %	90	72	89	71	81	65	79	64
Reflectance exterior %	9	9	9	9	16	16	15	15
Reflectance interior %	9	9	9	9	16	13	15	13
Glare reduction %	-	20	-	20	-	20	-	20
<b>Solar energy</b>								
Transmittance %	83	37	77	35	69	32	61	30
Absorptance %	9	28	16	36	18	37	27	47
Reflectance %	8	35	7	29	13	31	12	23
Total solar energy rejected %	14	55	18	54	24	51	30	50
Infrared rejection @ 780 to 2500 nm % <sup>1</sup>	20	95	28	95	-	-	-	-
Shading coefficient	.98	.52	.94	.53	.87	.56	.81	.57
Solar heat gain coefficient	.86	.45	.82	.46	.76	.49	.70	.50
Light to solar heat gain ratio (VLT/SHGC)	1.05	1.61	1.08	1.55	1.08	1.34	1.13	1.27
Solar heat gain reduction %	-	48	-	44	-	35	-	29
<b>Thermal energy</b>								
Emissivity	.84	.77	.84	.77	.84	.77	.84	.77
Winter U-factor (Btu hr/ft <sup>2</sup> °F)	1.04	1.00	1.02	.99	.48	.47	.47	.46
Summer U-factor (Btu hr/ft <sup>2</sup> °F)	.94	.90	.92	.89	.50	.49	.50	.48
Winter heat loss reduction %	-	4	-	3	-	2	-	2
<b>Ultraviolet light</b>								
Blocked @ 300 to 380 nm %	27	>99	34	>99	41	>99	50	>99

<sup>1</sup> Infrared rejection = 1 - average unweighted transmittance using ASTM E 903.

EXTERIOR VIEW



ONLY AVAILABLE THROUGH A PANORAMA DEALER

Performance results generated using LBNL Window 7.2 and NFRC standards. For full details and additional information please visit [www.solargard.com/panorama](http://www.solargard.com/panorama).

SK0314PANHL7 08/15  
© Copyright 2015, Saint-Gobain Performance Plastics and/or its affiliates

All Rights Reserved • [www.solargard.com](http://www.solargard.com)

