


PANORAMA® SLATE 10




INTERIOR VIEW

PANORAMA® SLATE 10

Slate 10 offers optimum privacy, strong heat and glare reduction, with softened natural light. This film is neutrally tinted, hardly noticeable from inside, with a reflective finish outside.

The Dual-Reflective Slate Series offers exceptional solar rejection performance with a more neutral finish. These films maintain views with reduced interior and exterior reflectance, while increasing privacy by day, and offering minimal reflectivity at night. The Slate Series is ideal for applications where glare is a primary consideration.


Comparison of performance on 1/8" (3mm) thick clear glass.

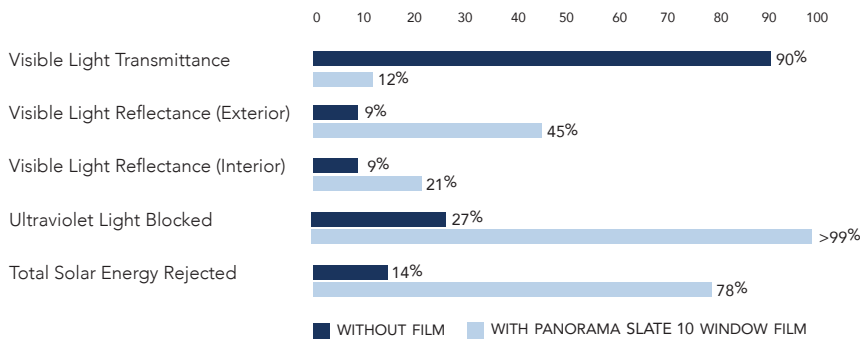

ONLY AVAILABLE THROUGH A PANORAMA DEALER

www.solargard.com/panorama

PANORAMA® SLATE 10



Performance Parameters for Different Window Types

	1/8" (3mm) Single clear		1/4" (6 mm) Single clear		1/8" (3mm) Double clear		1/4" (6mm) Double clear	
	No film	Slate 10	No film	Slate 10	No film	Slate 10	No film	Slate 10
Visible light								
Transmittance %	90	12	89	12	81	11	79	11
Reflectance exterior %	9	45	9	43	16	46	15	43
Reflectance interior %	9	21	9	21	16	21	15	21
Glare reduction %	-	87	-	87	-	86	-	87
Solar energy								
Transmittance %	83	8	77	8	69	7	61	6
Absorptance %	9	45	16	51	18	52	27	61
Reflectance %	8	47	7	41	13	41	12	33
Total solar energy rejected %	14	78	18	77	24	67	30	65
Infrared rejection @ 780 to 2500 nm % ¹	20	97	28	97	-	-	-	-
Shading coefficient	.98	.25	.94	.27	.87	.38	.81	.41
Solar heat gain coefficient	.86	.22	.82	.23	.76	.33	.70	.35
Light to solar heat gain ratio (VLT/SHGC)	1.05	.54	1.08	.49	1.08	.33	1.13	.30
Solar heat gain reduction %	-	75	-	71	-	56	-	50
Thermal energy								
Emissivity	.84	.82	.84	.82	.84	.82	.84	.82
Winter U-factor (Btu hr/ft ² °F)	1.04	1.03	1.02	1.01	.48	.48	.47	.47
Summer U-factor (Btu hr/ft ² °F)	.94	.92	.92	.91	.50	.50	.50	.49
Winter heat loss reduction %	-	1	-	1	-	0	-	0
Ultraviolet light								
Blocked @ 300 to 380 nm %	27	>99	34	>99	41	>99	50	>99

¹ Infrared rejection = 1 - average unweighted transmittance using ASTM E 903.

EXTERIOR VIEW



ONLY AVAILABLE THROUGH A PANORAMA DEALER

Performance results generated using LBNL Window 7.2 and NFRC standards. For full details and additional information please visit www.solargard.com/panorama.

SK0314PANSL1 08/15
© Copyright 2015, Saint-Gobain Performance Plastics and/or its affiliates

All Rights Reserved • www.solargard.com

